

Sistemi e Reti Wireless



Luciano Bononi

(bononi@cs.unibo.it)

<http://www.cs.unibo.it/~bononi/>


Ricevimento: sempre aperto .
 Si consiglia di concordare via e-mail almeno un giorno prima
 (informazioni in tempo reale sulla home page personale)

Figure-credits: some figures have been taken from slides published on the Web, by the following authors (in alphabetical order):
 J.J. Garcia Luna Aceves (ucsc), James F. Kurose & Keith W. Ross, Jochen Schiller (fub), Nitin Vaidya (uiuc)

© Luciano Bononi 2007

Sistemi e Reti Wireless


Wireless networks' spectrum

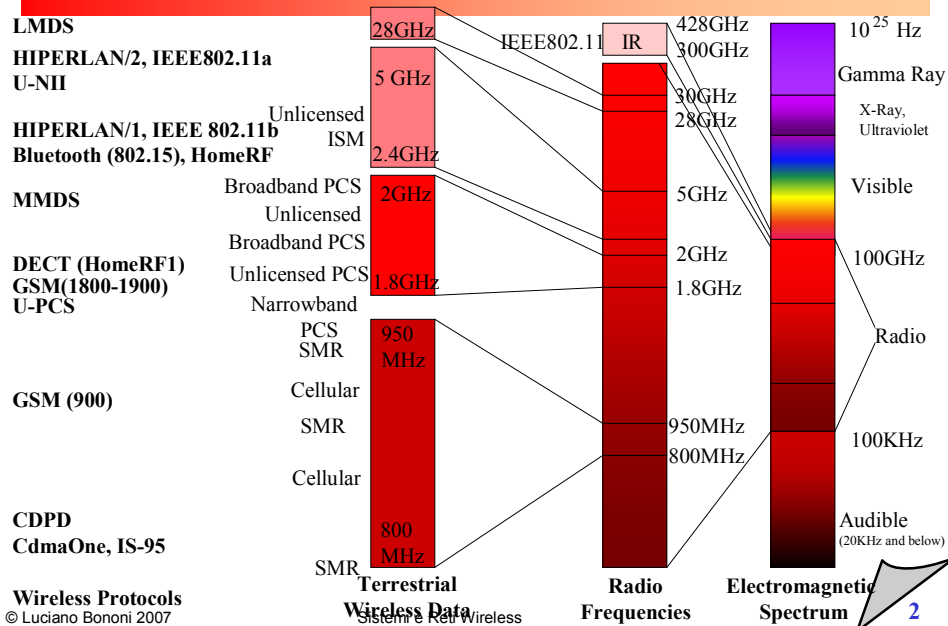

© Luciano Bononi 2007

Sistemi e Reti Wireless

Frequencies for (wired and wireless) communicat.

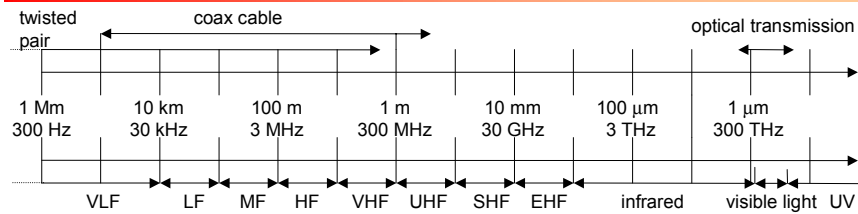

- VLF = Very Low Frequency
- LF = Low Frequency
- MF = Medium Frequency
- HF = High Frequency
- VHF = Very High Frequency
- Frequency and wave length:
- $\lambda = c/f$
- wave length λ , speed of light $c \cong 3 \times 10^8 \text{m/s}$, frequency f
- UHF = Ultra High Frequency
- SHF = Super High Frequency
- EHF = Extra High Frequency
- UV = Ultraviolet Light


© Luciano Bononi 2007

Sistemi e Reti Wireless

3

Wireless networks Bandwidth and Spectrum

- how can wireless channels have different bandwidth?
 - bits run less or more faster? (NO)
 - Light speed: $\sim < 300.000 \text{ Km/s}$ for every bit
 - the channel pipe (spectrum) is bigger (YES/NO)
 - the channel requires less time to accomodate (i.e. to code) one bit on the channel (YES)

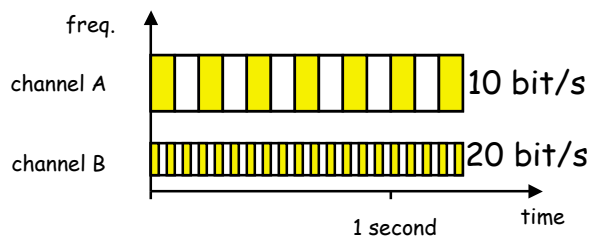

© Luciano Bononi 2007

Sistemi e Reti Wireless

4


Wireless networks' technology

- **Narrowband radio system**
 - transmit/receive using a single radio frequency
- **Spread Spectrum technology**
 - bandwidth efficiency vs. reliability and security
 - Frequency Hopping Spread Spectrum
 - narrowband carrier hopping in a pattern sequence
 - Direct Sequence Spread Spectrum
 - bit coding and transmission spreading over the spectrum
- **Infrared technology**
 - line of sight or diffused, short range (in room)


Wireless networks' technology

- **Radio transmission coverage**

host A (low Tx power)



host B (high Tx power)




"...is there anybody outthere?"

both isolated

Wireless networks' technology

- Radio transmission coverage

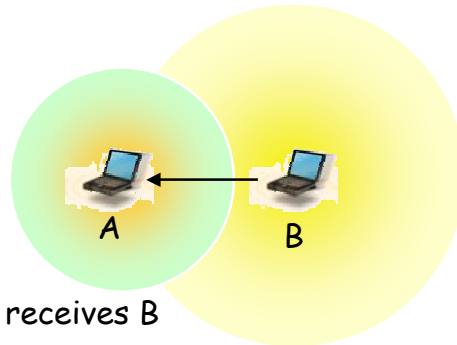

A receives B

B cannot receive A

unidirectional(*) link

(*) sometimes improperly referred
to as "asymmetric link"


© Luciano Bononi 2007

Sistemi e Reti Wireless

7

Wireless networks' technology

- Radio transmission coverage

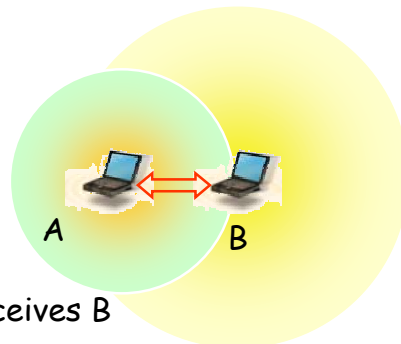

A receives B

B receives A

bidirectional(*) link

(*) sometimes improperly referred
to as "symmetric link"


© Luciano Bononi 2007

Sistemi e Reti Wireless

8

Wireless networks' technology

Radio transmission coverage

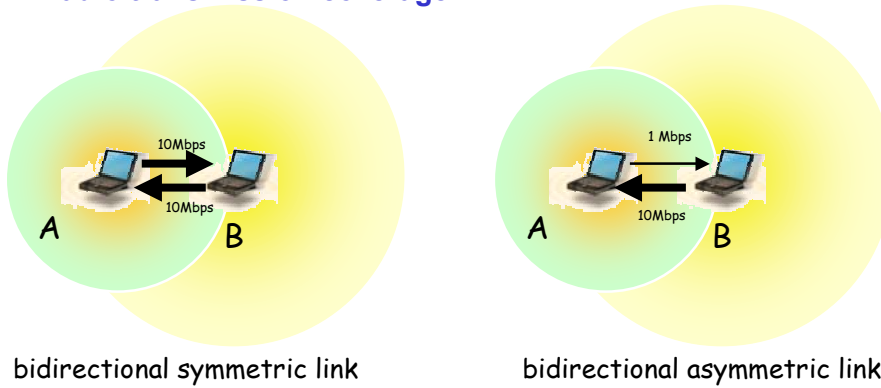



© Luciano Bononi 2007


Sistemi e Reti Wireless

9

Wireless networks' technology

Narrowband radio system

- transmit/receive using a single, licensed, as narrow as possible radio frequency
- undesired cross-talk between channels requires coordination and license for each site
- low data-rates
- e.g.  frequency X
- e.g.  frequency Y



© Luciano Bononi 2007



Sistemi e Reti Wireless

10

Wireless networks' technology

Frequency Hopping Spread Spectrum

- narrow band carrier changes frequency in a pattern known by both transmitter and receiver (single logical channel)
- to unintended receiver FHSS appears as impulse noise

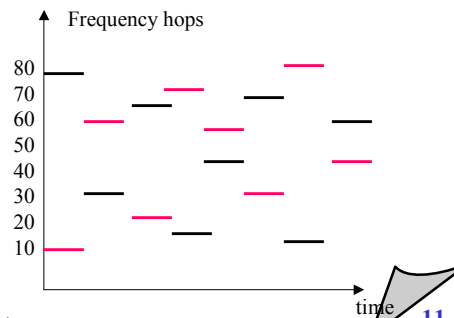

© Luciano Bononi 2007



Sistemi e Reti Wireless

11

Wireless networks' technology

Direct Sequence Spread Spectrum

- redundant bit pattern (chipping code) spread over a large spectrum. Long chips increase probability of recovering the original bit (with no retransmission)
- to unintended receiver DSSS appears as low power wideband noise



© Luciano Bononi 2007

Sistemi e Reti Wireless

12

Wireless networks' technology

- **Infrared Technology (IR)**
 - frequencies just below the visible light
 - cannot penetrate opaque objects, and low diffusion
 - line-of-sight limitates mobility
 - short range technology (indoor, PAN, LAN nets)
 - High data-rate potential



Transmission Technique Comparison

	PROS	CONS
Frequency Hopping Spread Spectrum (FHSS)	<ul style="list-style-type: none"> • Use less power than DSSS • Lower cost • Increased security due to frequency switching 	<ul style="list-style-type: none"> • Lower throughput than DSSS
Direct Sequence Spread Spectrum (DSSS)	<ul style="list-style-type: none"> • High performance • Low interference • Increased security due to chip coding 	<ul style="list-style-type: none"> • Expensive
Narrowband Microwave	<ul style="list-style-type: none"> • Long distance 	<ul style="list-style-type: none"> • Line-of-sight with satellite dish • Requires FCC license • Not designed for WLAN use
Infrared	<ul style="list-style-type: none"> • High bandwidth 	<ul style="list-style-type: none"> • Easily obstructed • Inexpensive

Wireless networks' coverage classification


- **Wireless Wide Area Network (WWAN)**
 - geographic coverage (e.g. satellite, cellular)
- **Wireless Metropolitan Area Net. (WMAN)**
 - Metropolitan coverage (e.g. town, large campus)
- **Wireless Local Area Network (WLAN)**
 - local area coverage (e.g. campus, building, home)
- **Wireless Personal Area Network (WPAN)**
 - reduced local area coverage (e.g. house, office)
- **Wireless Indoor Area Network (indoor)**
 - short range coverage (e.g. room, office)

© Luciano Bononi 2007

Sistemi e Reti Wireless

15

Wireless network positioning

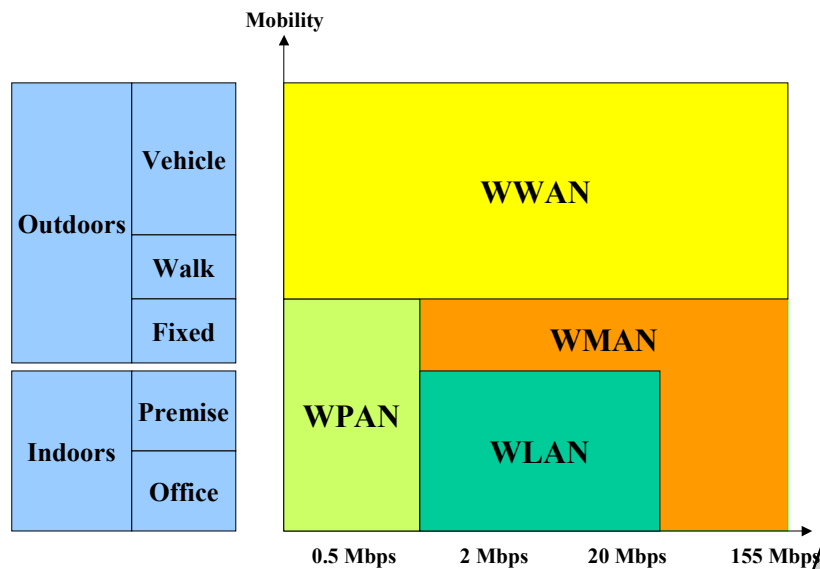


© Luciano Bononi 2007

Sistemi e Reti Wireless

16

IEEE 802 Wireless standards

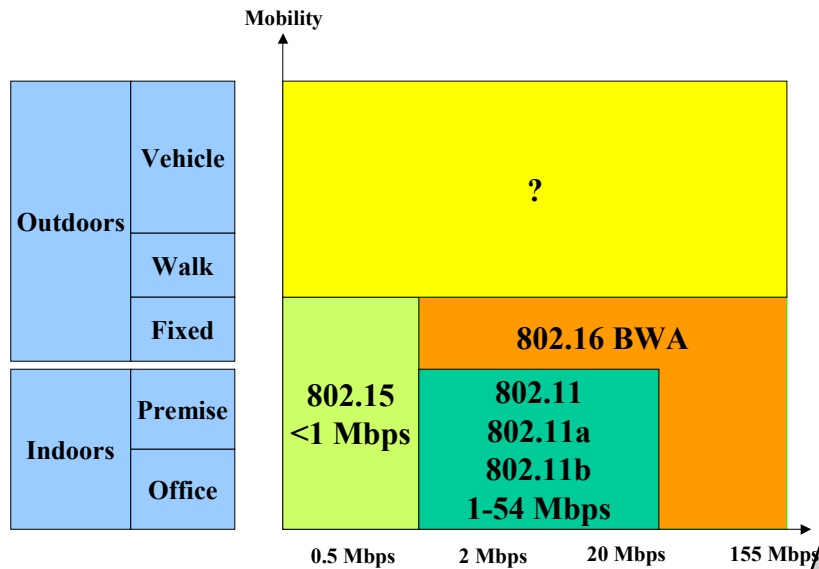


© Luciano Bononi 2007

Sistemi e Reti Wireless

17

Wireless network structures

- **WWAN and WMAN**
 - Satellite (low orbit, geo-stationary)

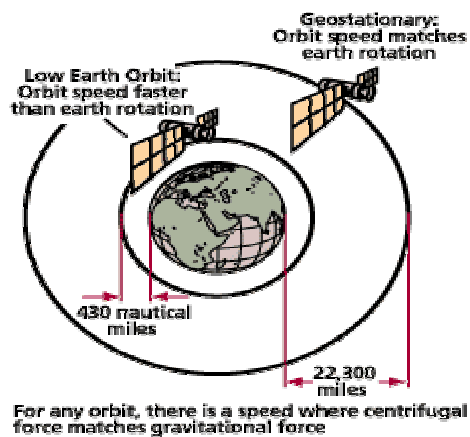

© Luciano Bononi 2007


Sistemi e Reti Wireless

18

Wireless network structures

▪ WWAN and WMAN

- Cellular or multi-Infrastructure WLAN
 - grid of Access Points (AP), managing local Mobiles terminals (MT), and connected to Backbones

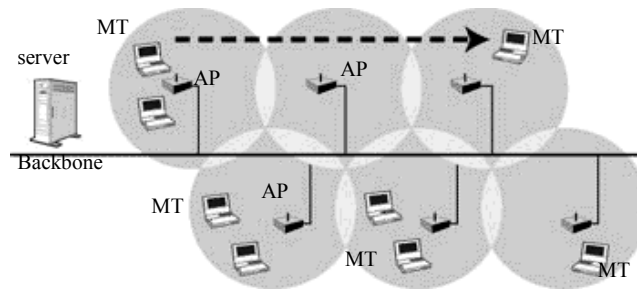

© Luciano Bononi 2007



Sistemi e Reti Wireless

19

Wireless network structures

▪ WLAN:

- Ad-Hoc:
 - peer-to-peer (P2P) “on the fly” communication
 - the network “is” the set of computers
 - no administration, no setup, no cost?
- Infrastructure:
 - Centralized control unit (Access Point, local server)
 - Roaming between cells
 - resource sharing and backbone connection

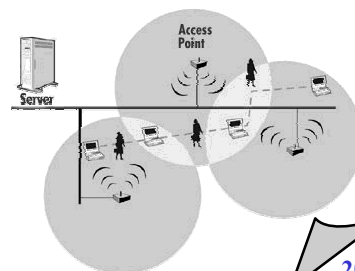

© Luciano Bononi 2007


Sistemi e Reti Wireless

20

Wireless network structures

- **WPAN:**

- cable connection alternative for in-home/office/workspace device connection
- common technology and protocols required (e.g. HomeRF, Bluetooth)



- **Indoor:**

- in room/workspace device connection


Wireless/Wired extension

- **Wireless protocols' design, integration, optimization**

- layering, bridging functions
- mobile IP
- support and management for QoS

- **support for Wired-like applications**

- Internet connectivity, DB access, e-mail
- value added services

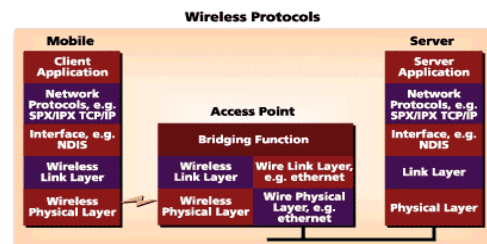

Wireless vs. Wired

Attribute	Wireless PAN/LAN	Wired LAN/PAN
Throughput	1-10 Mbps	10-100 Mbps
Integrity & Reliability	Subject to interference	Highly reliable
Simplicity/ Ease of Use	<ul style="list-style-type: none"> • No need to pull cable • Set up time is significantly lower • Moves, additions & changes much simpler 	<ul style="list-style-type: none"> • Cable required • Set up time is significantly higher
Security	<ul style="list-style-type: none"> • Susceptible to interception • encryption 	<ul style="list-style-type: none"> • Not as susceptible to interception


Wireless vs. Wired

Attribute	Wireless LAN/PAN	Wired LAN/PAN
Cost	<ul style="list-style-type: none"> • Initial investment in hardware costs more • Installation expenses and maintenance costs can be significantly lower 	<ul style="list-style-type: none"> • Investment cost in hardware lower • Installation and maintenance costs can be significantly higher
Scalability	simple to complex networks	simple to complex networks
Safety	Very little exposure to radio frequency energy	No exposure to radio frequency energy
Mobility	Provides access to real-time information anywhere	Does not support mobility

Wireless networks' interoperability

- **...with the Wired Infrastructure:**
 - most WLANs support industry-standard like Ethernet (802.3) and Token-Ring (802.5)
 - newer solutions support ATM, FireWire, PPP...
- **...with other Wireless infrastructures:**
 - several types of interoperability are possible
 - the role of Standard definitions is to allow compliant products to interoperate
 - interference is possible in co-located solutions
 - security achieved through encryption

Wireless networks' taxonomy

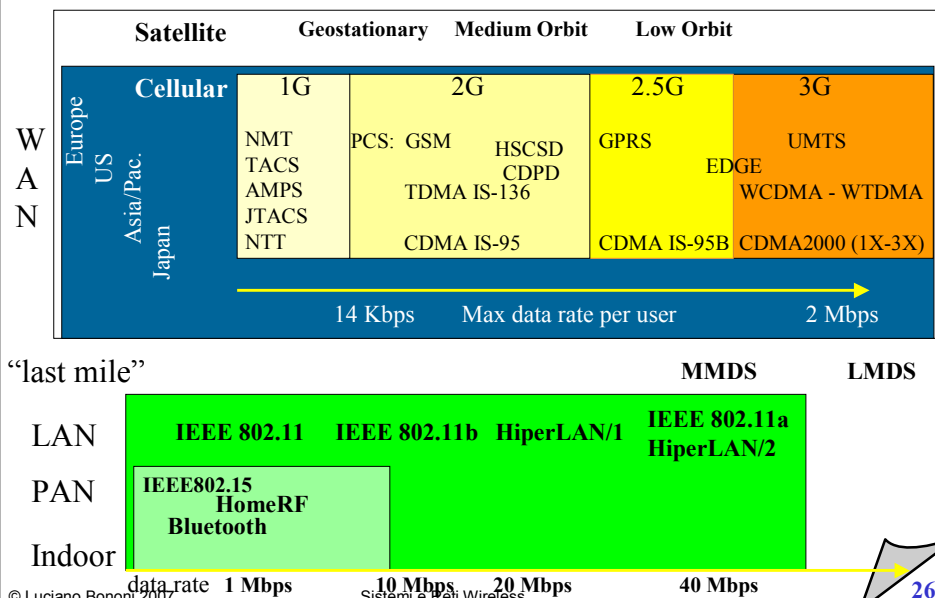

Wireless World means...

- **New assumptions for the physical system...**
- **...willing to maintain needs for services and applications**
 - e.g. audio/video applications, interactive services
- **... dealing with limited resources (e.g. bandwidth, energy)**
- **... dealing with device limits (I/O, user interfaces)**
 - limited display, no keyboard, no mouse
- **... mobility of users and devices**
 - variable number of users in the system
- **... QoS problems, reliability, negotiation**

Wireless World integration

- **One possible solution for Integraton with wired world:**
 - to uncouple wired and wireless networks
 - protocol integration, maintaining services and protocols view from both sides
 - protocols and SW structures to adapt the contents transferred to etherogeneous devices
 - adaptive behavior of network protocols (from the wireless side)
 - the wired host does not know if the other host is wireless and dialogue with it in the standard wireless way (protocol transparency)
 - the wireless host know it is wireless and implements adaptive behavior

Wireless drawbacks

- **reduced Channel Capacity (1 or 2 order of magnitude)**
 - e.g. 54 Mbps vs. Gigabit Ethernet
- **Limited spectrum (etherogeneous frequency windows) available**
 - need for international frequency-allocation plans
 - need for frequency reuse
- **Limited energy (batteries): +20% every 5 years**
 - Moore law: SoC transistors double every year
- **Noise and Interference have great impact on performances and system design**
 - need for high power, bit error correction
- **Security: sensible information travels “on the air”**
 - need for protection based on cyphering, authentication, etc.

© Luciano Bononi 2007

Sistemi e Reti Wireless

29

Wireless drawbacks


- **Mobility management**
 - addressing and routing (eg. Mobile IP)
- **Location Tracking**
 - Broadcasting (paging) to find users/hosts
 - support for Location Based Services
- **QoS Management**
 - not a single layer management (application, transport, network, MAC)
 - depends on the system/user/application scenario
 - managed for the wireless cell only (no multi-hop)
 - advance reservation, admission control policies (centralized, distributed)
 - scheduling (centralized, distributed) for resources' allocation
- **Best effort services**

© Luciano Bononi 2007

Sistemi e Reti Wireless

30

Frequencies for (wired and wireless) communicat.

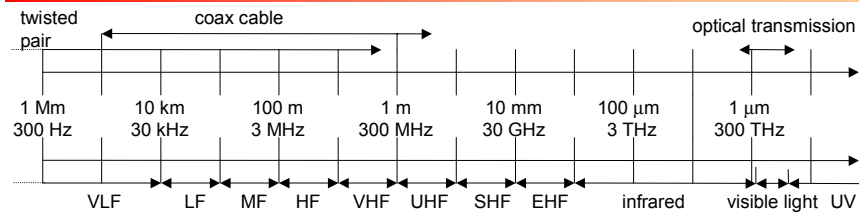

- VLF = Very Low Frequency
- LF = Low Frequency
- MF = Medium Frequency
- HF = High Frequency
- VHF = Very High Frequency
- Frequency and wave length:
 - $\lambda = c/f$
 - wave length λ , speed of light $c \cong 3 \times 10^8 \text{m/s}$, frequency f
- UHF = Ultra High Frequency
- SHF = Super High Frequency
- EHF = Extra High Frequency
- UV = Ultraviolet Light

Frequencies for mobile communication

- VHF/UHF ranges for mobile radio
 - simple, small antenna for cars
 - deterministic propagation characteristics, reliable connections
- SHF and higher for directed radio links, satellite communication
 - small antenna, large bandwidth available
- Wireless LANs use frequencies in UHF to SHF spectrum
 - some systems planned up to EHF
 - limitations due to absorption by water and oxygen molecules (resonance frequencies)
 - weather dependent fading, signal loss caused by heavy rainfall...

Frequencies and regulations

- **ITU-R holds auctions for new frequencies, manages frequency bands worldwide (WRC, World Radio Conferences)**

	Europe	USA	Japan
Cellular Phones	GSM 450-457, 479-486/460-467, 489-496, 890-915/935-960, 1710-1785/1805-1880 UMTS (FDD) 1920-1980, 2110-2190 UMTS (TDD) 1900-1920, 2020-2025	AMPS, TDMA, CDMA 824-849, 869-894 TDMA, CDMA, GSM 1850-1910, 1930-1990	PDC 810-826, 940-956, 1429-1465, 1477-1513
Cordless Phones	CT1+ 885-887, 930-932 CT2 864-868 DECT 1880-1900	PACS 1850-1910, 1930-1990 PACS-UB 1910-1930	PHS 1895-1918 JCT 254-380
Wireless LANs	IEEE 802.11 2400-2483 HIPERLAN 2 5150-5350, 5470-5725	902-928 IEEE 802.11 2400-2483 5150-5350, 5725-5825	IEEE 802.11 2471-2497 5150-5250
Others	RF-Control 27, 128, 418, 433, 868	RF-Control 315, 915	RF-Control 426, 868



© Luciano Bononi 2007

Sistemi e Reti Wireless

33

Antennas: isotropic radiator

- **How electromagnetic waves diffuse on space?**
- **Isotropic radiator: equal radiation in all directions (three dimensional)**
 - only a theoretical reference antenna
- **Real antennas always have directive effects (vertically and/or horizontally)**
- **Radiation pattern: measurement of radiation around an antenna**



ideal
isotropic
radiator

© Luciano Bononi 2007

Sistemi e Reti Wireless


34

Antennas: simple dipoles

- Real antennas are not isotropic radiators but, e.g., dipoles
→ shape of antenna proportional to wavelength



- Example: Radiation pattern of a simple Hertzian dipole

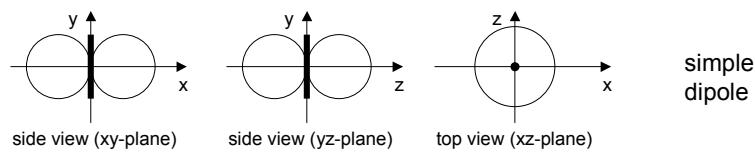

- Gain: maximum power in the direction of the main lobe compared to the power of an isotropic radiator (with the same average power)



© Luciano Bononi 2007

Sistemi e Reti Wireless

35

Antennas: directed and sectorized

- Often used for microwave connections or base stations for mobile phones (e.g., radio coverage of a valley)

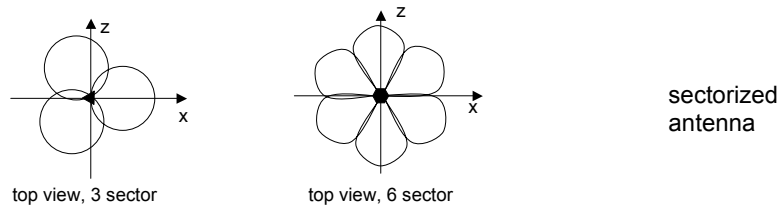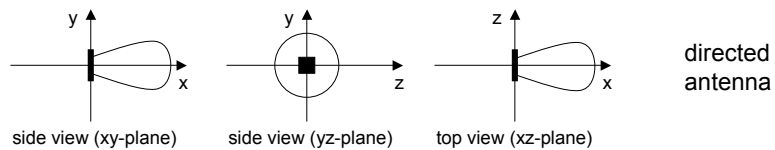


© Luciano Bononi 2007

Sistemi e Reti Wireless

36

Antennas: diversity

- **Grouping of 2 or more antennas**
 - multi-element antenna arrays
- **Antenna diversity**
 - switched diversity, selection diversity
 - receiver chooses antenna with largest output
 - diversity combining
 - combine output power to produce gain
 - cophasing needed to avoid cancellation

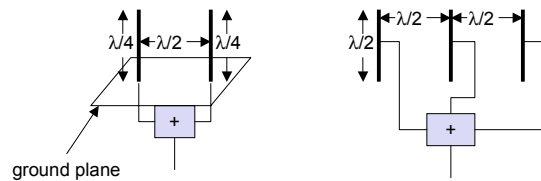

© Luciano Bononi 2007


Sistemi e Reti Wireless

37

Multiplexing: multiple use of shared medium

- **Multiplexing in 4 dimensions**

- space (s_i)
- time (t)
- frequency (f)
- code (c)

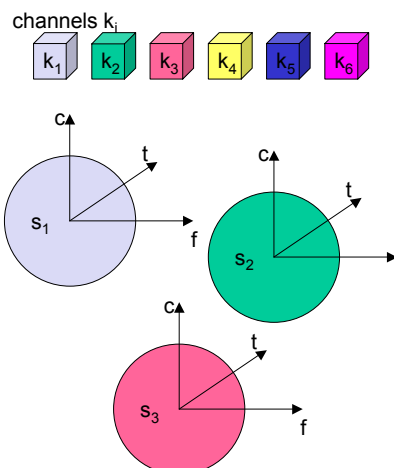

- **Goal: multiple use of a shared medium**

- **Important: guard spaces needed!**


© Luciano Bononi 2007

Sistemi e Reti Wireless

38

Frequency multiplex

- Separation of the whole spectrum into smaller frequency bands
- A channel gets a certain band of the spectrum for the whole time
- Advantages:
 - no dynamic coordination necessary
 - works also for analog signals
- Disadvantages:
 - waste of bandwidth if the traffic is distributed unevenly
 - inflexible
 - guard spaces

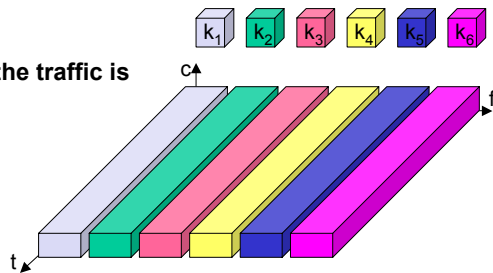


© Luciano Bononi 2007

Sistemi e Reti Wireless

39

Time multiplex

- A channel gets the whole spectrum for a certain amount of time
- Advantages:
 - only one carrier in the medium at any time
 - throughput high even for many users
- Disadvantages:
 - precise synchronization necessary

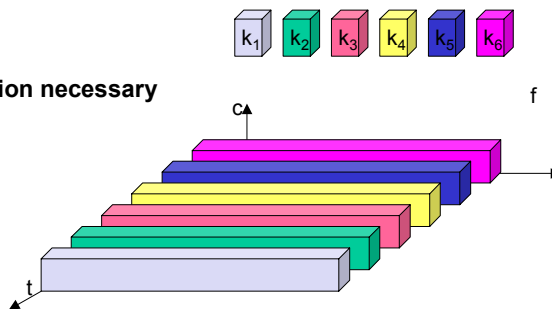


© Luciano Bononi 2007

Sistemi e Reti Wireless

40

Time and frequency multiplex

- **Combination of both methods**
- **A channel gets a certain frequency band for a certain amount of time**
 - **Example: GSM**
- **Advantages:**
 - **better protection against tapping**
 - **protection against frequency selective interference**
 - **higher data rates compared to code mux**
- **but:**
 - **precise coordination required**

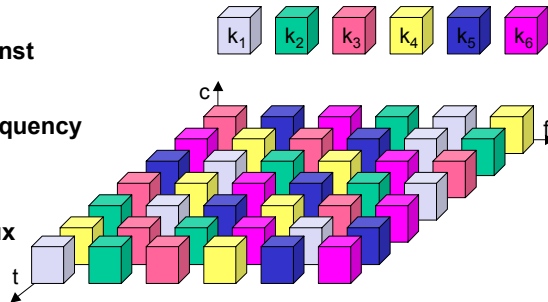


© Luciano Bononi 2007

Sistemi e Reti Wireless

41

Code multiplex

- **Each channel has a unique code**
- **All channels use the same spectrum at the same time**
- **Advantages:**
 - **bandwidth efficient**
 - **no coordination and synchronization necessary**
 - **good protection against interference and tapping**
- **Disadvantages:**
 - **lower user data rates**
 - **more complex signal regeneration (€)**
- **Implemented using spread spectrum technology**

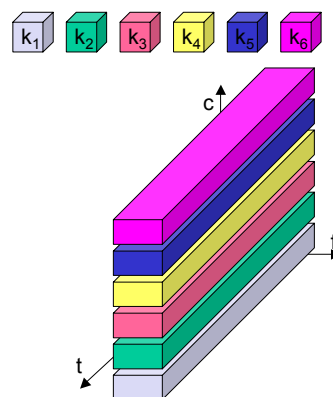

© Luciano Bononi 2007

Sistemi e Reti Wireless

42

Modulation


- **Digital modulation**
 - digital data is translated into an analog signal (baseband)
 - ASK, FSK, PSK differences in spectral efficiency, power efficiency, robustness
- **Analog modulation**
 - shifts center frequency of baseband signal up to the radio carrier (i.e. FM)
- **Motivation**
 - smaller antennas (e.g., $\lambda/4$)
 - Frequency Division Multiplexing
 - medium characteristics
- **Basic schemes**
 - Amplitude Modulation (AM)
 - Frequency Modulation (FM)
 - Phase Modulation (PM)

© Luciano Bononi 2007

Sistemi e Reti Wireless

43

Modulation and demodulation

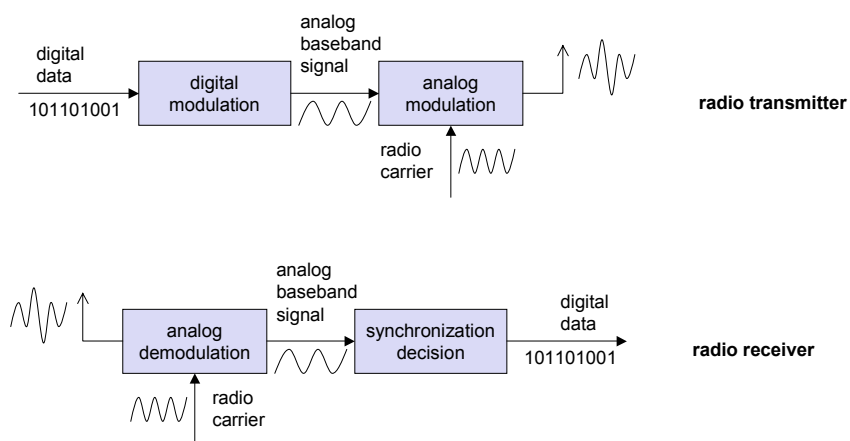

© Luciano Bononi 2007

Sistemi e Reti Wireless

44

Signals I

- **physical representation of data**
 - function of time and location
- **signal parameters: parameters representing the value of data**
- **classification**
 - continuous time/discrete time
 - continuous values/discrete values
 - analog signal = continuous time and continuous values
 - digital signal = discrete time and discrete values
- **signal parameters of periodic signals:**
period T, frequency $f=1/T$, amplitude A, phase shift φ
 - sine wave as special periodic signal for a carrier:

$$s(t) = A_t \sin(2 \pi f_t t + \varphi_t)$$


© Luciano Bononi 2007

Sistemi e Reti Wireless


45

Fourier representation of periodic signals


$$g(t) = \frac{1}{2}c + \sum_{n=1}^{\infty} a_n \sin(2\pi nft) + \sum_{n=1}^{\infty} b_n \cos(2\pi nft)$$




few harmonics composition



periodic signal



many (infinite) harmonics



ideal periodic signal

© Luciano Bononi 2007


Sistemi e Reti Wireless

46

Signals II

- **Different representations of signals**

- amplitude (amplitude domain)
- frequency spectrum (frequency domain)
- phase state diagram (amplitude M and phase φ in polar coordinates)

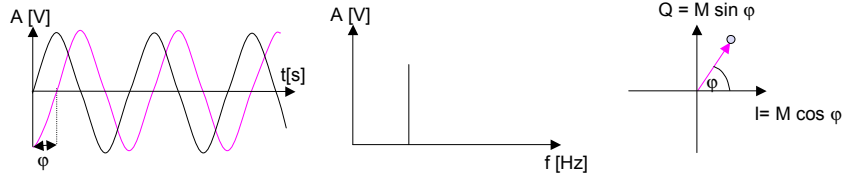

- **Composed signals transferred into frequency domain using Fourier transformation**

- **Digital signals need**

- infinite frequencies for perfect transmission
- modulation with a carrier frequency for transmission (analog signal!)

© Luciano Bononi 2007

Sistemi e Reti Wireless

47

Digital modulation

- **Modulation of digital signals known as Shift Keying**

- **Amplitude Shift Keying (ASK):**


- very simple
- low bandwidth requirements
- very susceptible to interference

- **Frequency Shift Keying (FSK):**

- needs larger bandwidth

- **Phase Shift Keying (PSK):**

- more complex
- robust against interference

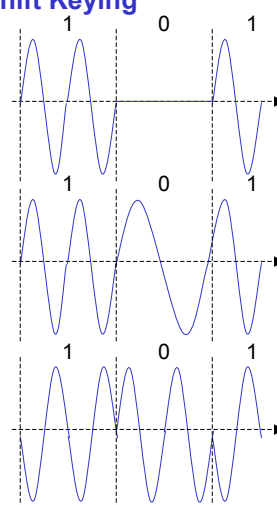

© Luciano Bononi 2007


Sistemi e Reti Wireless

48

Advanced Frequency Shift Keying

- bandwidth needed for FSK depends on the distance between the carrier frequencies (range of frequency variation).
- special pre-computation avoids sudden phase shifts
→ MSK (Minimum Shift Keying)
- bit separated into even and odd bits, the duration of each bit is doubled
- depending on the bit values (even, odd) the higher or lower frequency, original or inverted is chosen
- the frequency of one carrier is twice the frequency of the other
- Equivalent to offset QPSK (relative to last two phase changes)
 - (US) IS 136, PACS, (Jap) PHS
- even higher bandwidth efficiency using a Gaussian low-pass filter
→ GMSK (Gaussian MSK), used in GSM




Example of MSK

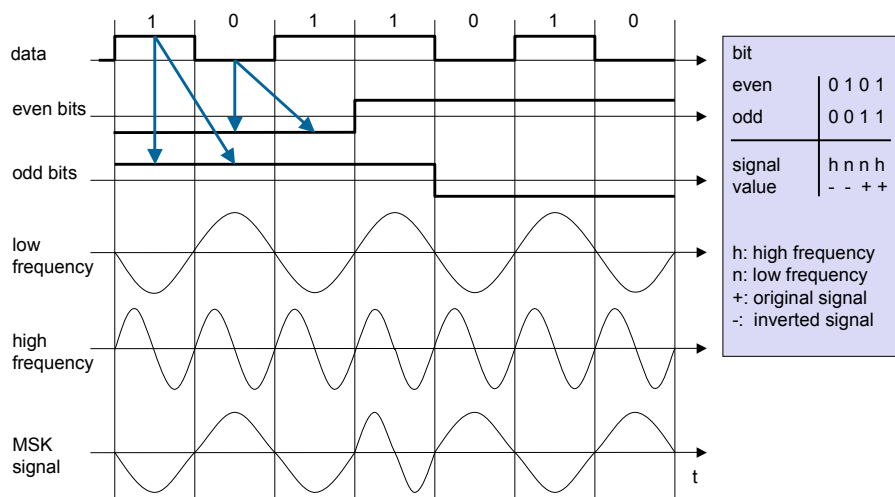

No phase shifts!

Advanced Phase Shift Keying

- **BPSK (Binary Phase Shift Keying):**
 - bit value 0: sine wave
 - bit value 1: inverted sine wave
 - very simple PSK
 - low spectral efficiency
 - robust, used e.g. in satellite systems
- **QPSK (Quadrature Phase Shift Keying):**
 - 2 bits coded as one symbol
 - symbol determines shift of sine wave
 - needs less bandwidth compared to BPSK
 - more complex
- Often also transmission of relative, not absolute phase shift: **DQPSK - Differential QPSK (IS-136, PHS)**



© Luciano Bononi 2007

Sistemi e Reti Wireless


51

Quadrature Amplitude Modulation

- **Quadrature Amplitude Modulation (QAM):** combines amplitude and phase modulation
- it is possible to code n bits using one symbol
- 2^n discrete levels, $n=2$ identical to QPSK
- bit error rate increases with n , but less errors compared to comparable PSK schemes

Example: 16-QAM (4 bits = 1 symbol)

- Symbols 0011 and 0001 have the same phase, but different amplitude.
- 0000 and 1000 have different phase, but same amplitude.
- → used in standard **9600 bit/s** modems



© Luciano Bononi 2007


Sistemi e Reti Wireless

52

Hierarchical Modulation

- modulates two separate data streams onto a single stream
- High Priority (HP) embedded within a Low Priority (LP) stream
- Multi carrier system, about 2000 or 8000 carriers
- QPSK, 16 QAM, 64QAM
- Example: 64QAM

- good reception: resolve the entire 64QAM constellation
- poor reception, mobile reception: resolve only QPSK portion
- 6 bit per QAM symbol, 2 most significant determine QPSK
- HP service coded in QPSK (2 bit), LP uses remaining 4 bit




Multi-carrier Modulation (MCM)

- modulates one high rate data stream onto many low rate bit streams each one modulated on a separate sub-carrier
 - Orthogonal Frequency Division Multiplexing (OFDM)
 - Coded Orthogonal Frequency Division Multiplexing (COFDM)
 - E.g. Digital Audio Broadcasting (DAB): 192 – 1536 subcarriers
- ISI interference mitigation (few subcarriers affected by selective fading)

Spread spectrum technology

- **Problem of radio transmission: frequency dependent fading can wipe out narrow band signals for duration of the interference**
- **CDMA: spread narrowband signal into broadband signal using special code**
- **protection against narrow band interference**

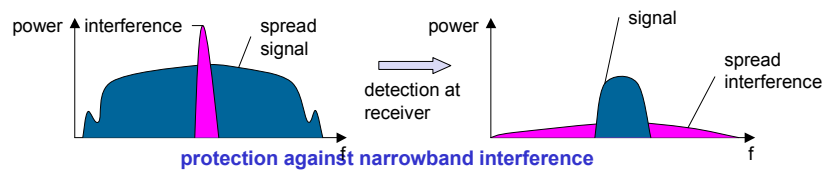


- **Side effects:**
 - coexistence of several signals without dynamic coordination
 - tap-proof (cannot be detected without knowing the code)
- **Alternatives: Direct Sequence, Frequency Hopping**

Spread spectrum technology

- **intuitive example: narrowband interference effect on transmission:**


- transmit "Hello World" coded using narrowband "yellow" frequency and broadband "many colors" frequencies

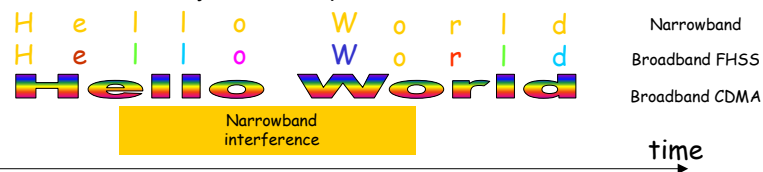

- a burst of yellow interference adds to the signal for a significant time: what is the result at the receiver?



Effects of spreading and interference

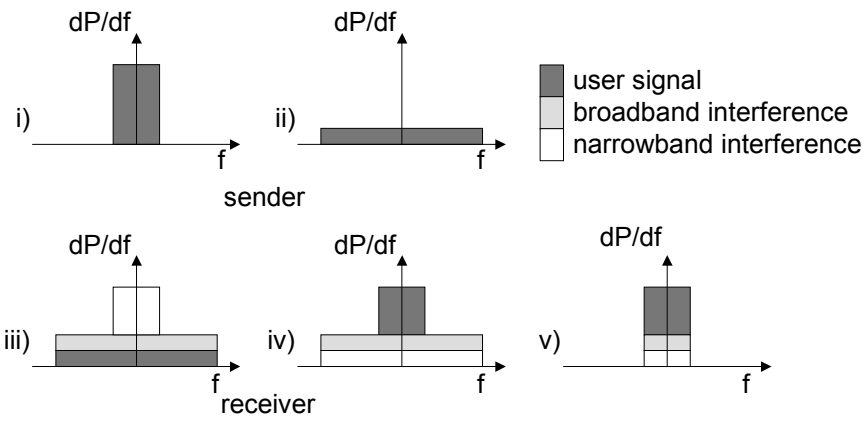


© Luciano Bononi 2007

Sistemi e Reti Wireless

57

Spreading and frequency selective fading

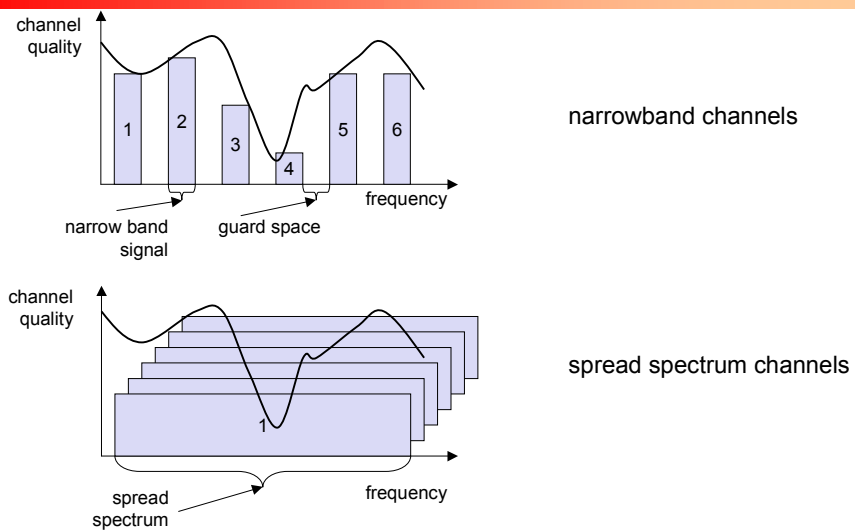


© Luciano Bononi 2007

Sistemi e Reti Wireless


58

DSSS (Direct Sequence Spread Spectrum) I

- XOR of the signal with pseudo-random number (chipping sequence)
 - many chips per bit (e.g., 128) result in higher bandwidth of the signal (low throughput)
- Advantages
 - reduces frequency selective fading
 - in cellular networks
 - base stations can use the same frequency range
 - several base stations can detect and recover the signal
 - soft handover
- Disadvantages
 - precise power control necessary

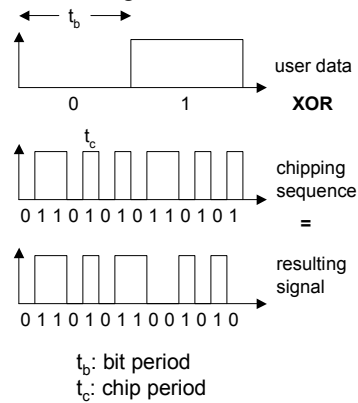

DSSS (Direct Sequence Spread Spectrum) II

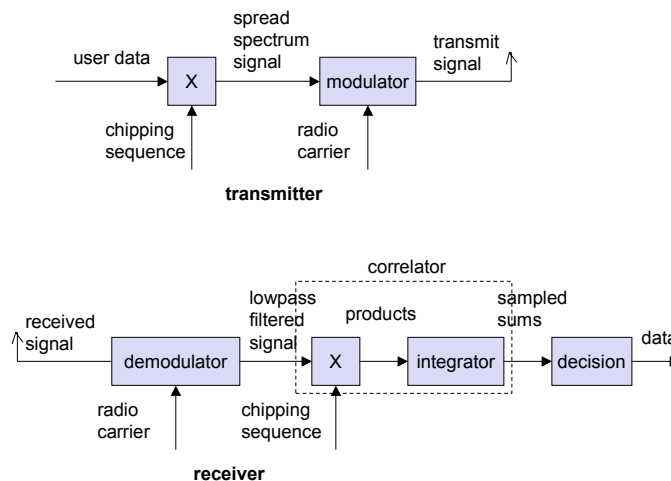

FHSS (Frequency Hopping Spread Spectrum) I


- **Discrete changes of carrier frequency**
 - sequence of frequency changes determined via pseudo random number sequence (e.g. seed = f(host identifier in Bluetooth))
- **Two versions**
 - Fast Hopping:
several frequencies per user bit
 - Slow Hopping:
several user bits per frequency
- **Advantages**
 - frequency selective fading and interference limited to short period
 - simple implementation
 - uses only small portion of spectrum at any time
- **Disadvantages**
 - not as robust as DSSS
 - simpler to detect

© Luciano Bononi 2007

Sistemi e Reti Wireless

61

FHSS (Frequency Hopping Spread Spectrum) II

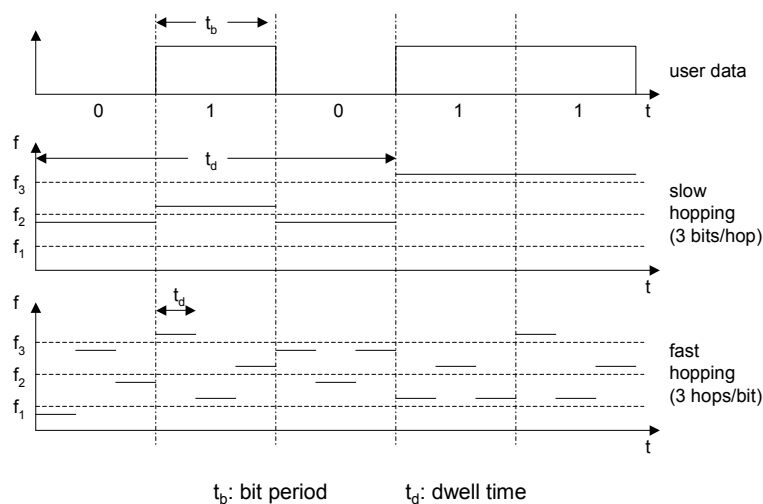


© Luciano Bononi 2007

Sistemi e Reti Wireless

62

FHSS (Frequency Hopping Spread Spectrum) III

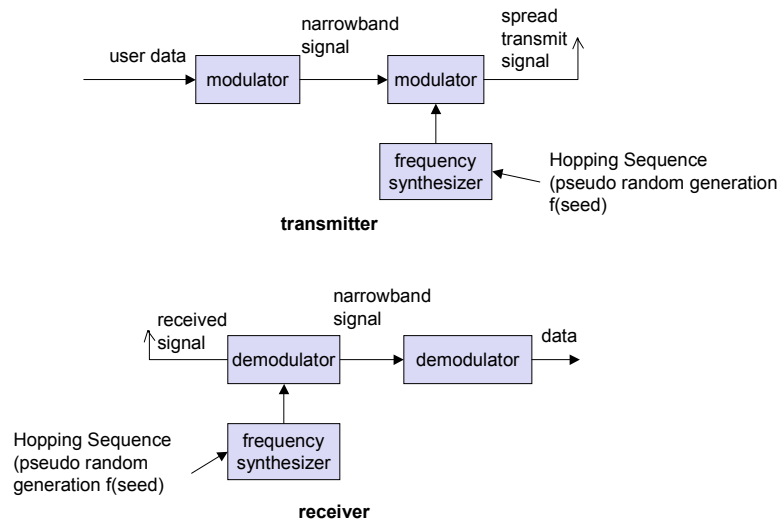

Nyquist Bandwidth

Assumptions:

- Channel noise free
- “if the rate of signal transmission is $2B$ then a signal with frequency not greater than B is sufficient to carry the data rate”
- Given M symbols that can be coded on the channel by using carrier with frequency B

$$C = 2B \log_2 M$$

That is, by doubling the carrier bandwidth could double the bitrate

Shannon Capacity Formula

- If the signal to noise ratio is
 - $SNR_{dB} = 10 \log_{10}(\text{signal power}/\text{noise power})$
- Then the maximum (error free) channel capacity in bits/second is

$$C = B \log_2(1+SNR)$$

- E.g. channel between 3 Mhz and 4 Mhz and SNR = 24 dB

$$B = 4 - 3 \text{ Mhz} = 1 \text{ Mhz}$$

$$SNR = 24 \text{ dB} = 10 \log_{10}(SNR) \Rightarrow SNR = 251$$

By applying Shannon: $C = 10E+6 * \log_2(1+251) = 8 \text{ Mbps}$ (ideal scenario)

By applying Nyquist: $C = 2B \log_2 M \Rightarrow 8 \text{ Mbps} = 2 * 10E+6 * \log_2 M$

$$4 = \log_2 M \Rightarrow M = 16$$

Access method CDMA

- **CDMA (Code Division Multiple Access)**
 - all terminals send on the same frequency probably at the same time and can use the whole bandwidth of the transmission channel
 - each sender has a unique random number, the sender XORs the signal with this random number
 - the receiver can "tune" into this signal if it knows the pseudo random number, tuning is done via a correlation function
- **Disadvantages:**
 - higher complexity of a receiver (receiver cannot just listen into the medium and start receiving if there is a signal)
 - all signals should have the same strength at a receiver
- **Advantages:**
 - all terminals can use the same frequency, no planning needed
 - huge code space (e.g. 2^{32}) compared to frequency space
 - interferences (e.g. white noise) is not coded
 - forward error correction and encryption can be easily integrated

CDMA in theory

- **Sender A**
 - sends $A_d = 1$, key $A_k = 010011$ (assign: „0“= -1, „1“= +1)
 - sending signal $A_s = A_d * A_k = (-1, +1, -1, -1, +1, +1)$
- **Sender B**
 - sends $B_d = 0$, key $B_k = 110101$ (assign: „0“= -1, „1“= +1)
 - sending signal $B_s = B_d * B_k = (-1, -1, +1, -1, +1, -1)$
- **Both signals superimpose in space**
 - interference neglected (noise etc.)
 - $A_s + B_s = (-2, 0, 0, -2, +2, 0)$
- **Receiver wants to receive signal from sender A**
 - apply key A_k bitwise (inner product)
 - $A_e = (-2, 0, 0, -2, +2, 0) \bullet A_k = 2 + 0 + 0 + 2 + 2 + 0 = 6$
 - result greater than 0, therefore, original bit was „1“
 - receiving B
 - $B_e = (-2, 0, 0, -2, +2, 0) \bullet B_k = -2 + 0 + 0 - 2 - 2 + 0 = -6$, i.e. „0“

© Luciano Bononi 2007

Sistemi e Reti Wireless

67

CDMA on signal level I

data A	1						0				1				A_d				
key A	[Waveform: +1, -1, +1, -1, +1, -1, +1, -1, +1, -1, +1, -1]																		
key sequence A	0	1	0	1	0	0	1	0	0	0	1	0	1	1	0	0	1	1	A_k
data \oplus key	1	0	1	0	1	1	1	0	0	0	1	0	0	0	1	1	0	0	
signal A	[Waveform: +1, -1, +1, -1, +1, -1, +1, -1, +1, -1, +1, -1]												A_s						


Real systems use much longer keys resulting in a larger distance between single code words in code space.

© Luciano Bononi 2007

Sistemi e Reti Wireless

68

CDMA on signal level II

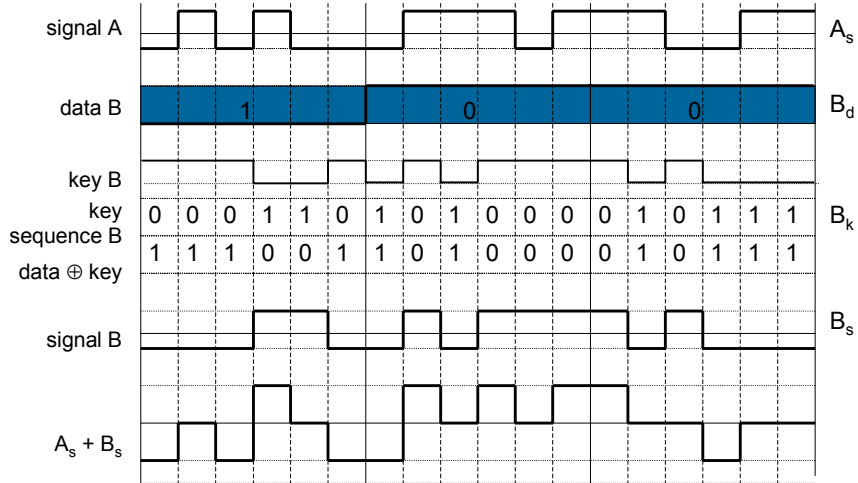


© Luciano Bononi 2007

Sistemi e Reti Wireless

69

CDMA on signal level III

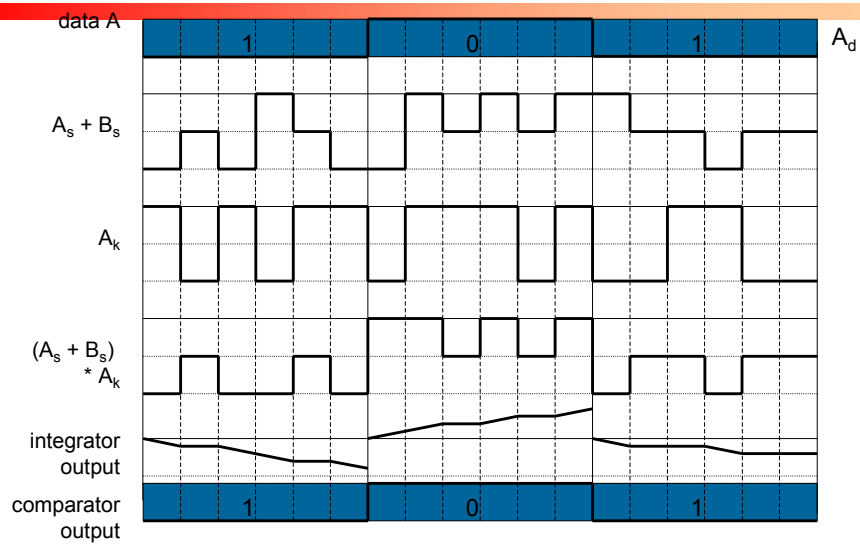


© Luciano Bononi 2007

Sistemi e Reti Wireless

70

CDMA on signal level IV

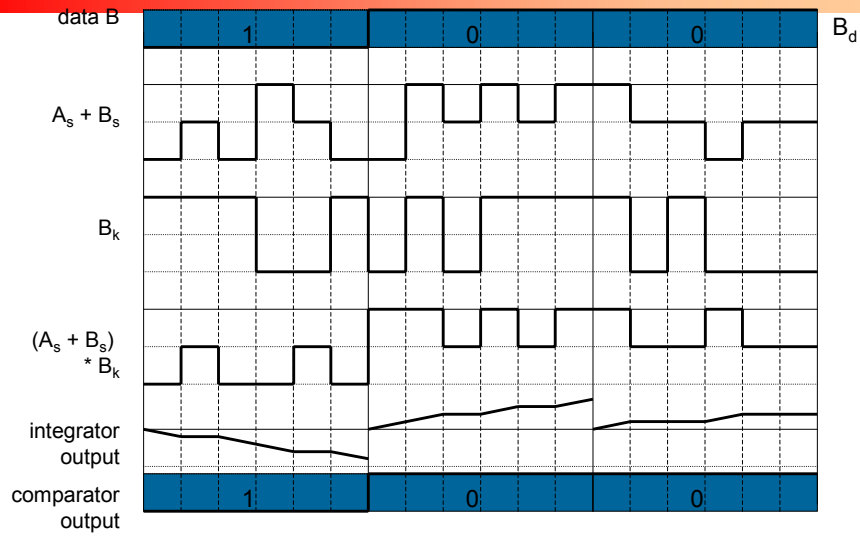


© Luciano Bononi 2007

Sistemi e Reti Wireless

71

CDMA on signal level V

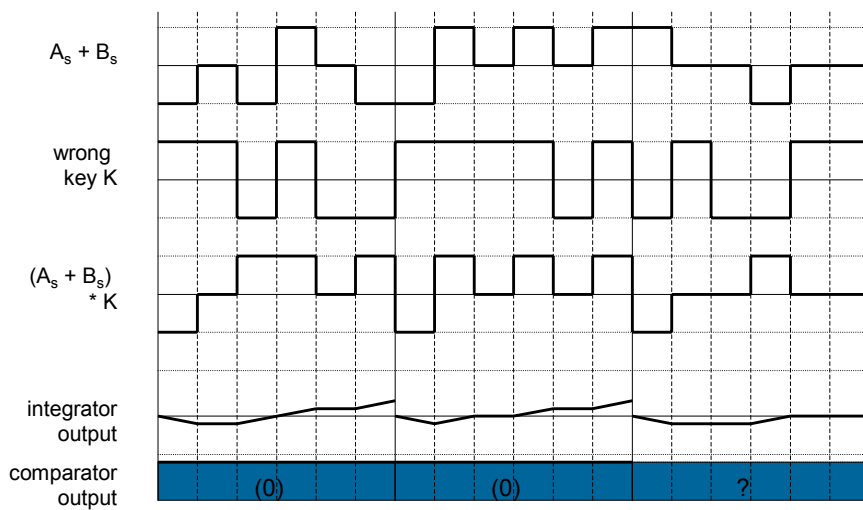

© Luciano Bononi 2007

Sistemi e Reti Wireless

72

Space division mux: cell structure


- **space division multiplex:**
 - base station covers a certain transmission area (cell)
- **Mobile stations communicate only via the base station**
- **Advantages of cell structures:**
 - higher capacity, higher number of users
 - less transmission power needed
 - more robust, decentralized
 - base station deals with interference, transmission area etc. locally
- **Problems:**
 - fixed network needed for the base stations (infrastructure)
 - handover (changing from one cell to another) necessary
 - interference with other cells
- **Cell sizes from some 100 m in cities to, e.g., 35 km on the country side (GSM) - even less for higher frequencies**

© Luciano Bononi 2007

Sistemi e Reti Wireless

73

Frequency planning I

- **Frequency reuse only with a certain distance between the base stations**
- **Standard model using 7 frequencies:**
- **Fixed frequency assignment:**
 - certain frequencies are assigned to a certain cell
 - problem: different traffic load in different cells
- **Dynamic frequency assignment:**
 - base station chooses frequencies depending on the frequencies already used in neighbor cells
 - more capacity in cells with more traffic
 - assignment can also be based on interference measurements


© Luciano Bononi 2007

Sistemi e Reti Wireless

74

Cell breathing

- CDM systems: cell size depends on current load
- Additional traffic appears as noise to other users
- If the noise level is too high users drop out of cells

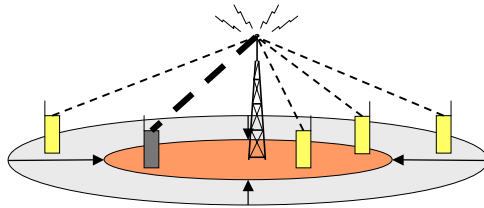

Network protocols: the glue for integration

- Networks deal with:
 - computer hardware, software, operating systems, transmission technology, services defined over it...
 - **how is it glued?**
 - **and how to glue the existing with the wireless world?**
- Communication protocols
 - implemented in software or hardware, transform otherwise isolated machines into **a society of computers**
 - specify how processes in different machines can interact to provide a given service (at different layers)

Communication Protocols

- A set of rules governing the interaction of concurrent processes in a system
- A protocol has mainly five parts:
 - The service it provides
 - The assumptions about the environment where it executes, including the services it enjoys
 - The vocabulary of messages used to implement it
 - The format of each message in the vocabulary
 - The procedure rules (algorithms) guarding the consistency of message exchanges and the integrity of the service provided

Communication Protocols

- A protocol always involves at least two processes
 - i.e. Phone call
- **Distributed algorithms**
 - i.e. to define and evaluate the “(wireless) hosts society” behavior
- **Correctness:**
 - The protocol provides the desired service indefinitely, provided operational assumptions are valid.
- **Performance:**
 - Because information and behavior of network are random, we focus on average behavior
- A protocol must provide its intended service (efficiently)
 - design choices and protocol definition